

CrimperRoller

by  LyckeGård



The new generation of crop rollers

CrimperRoller crushes green manure crops and processes the soil surface according to your needs.

The chevron-patterned blades on the drum cut and crush the plant and its growth interrupts. The cover crop mulch competes well with weeds and improves soil structure, nutrient content and conserves moisture in the soil surface. The drum can be filled with water for extra weight.



Suitable for all types of green manure, cover crops and stubble



The cover crop mulch is quickly degrading, improving soil carbon content and soil structure



Can be used with a cultivator or a direct drilling machine in one passage




The cover crop mulch competes well with weeds and maintains soil moisture



Economic and environmentally friendly



Enables high capacity

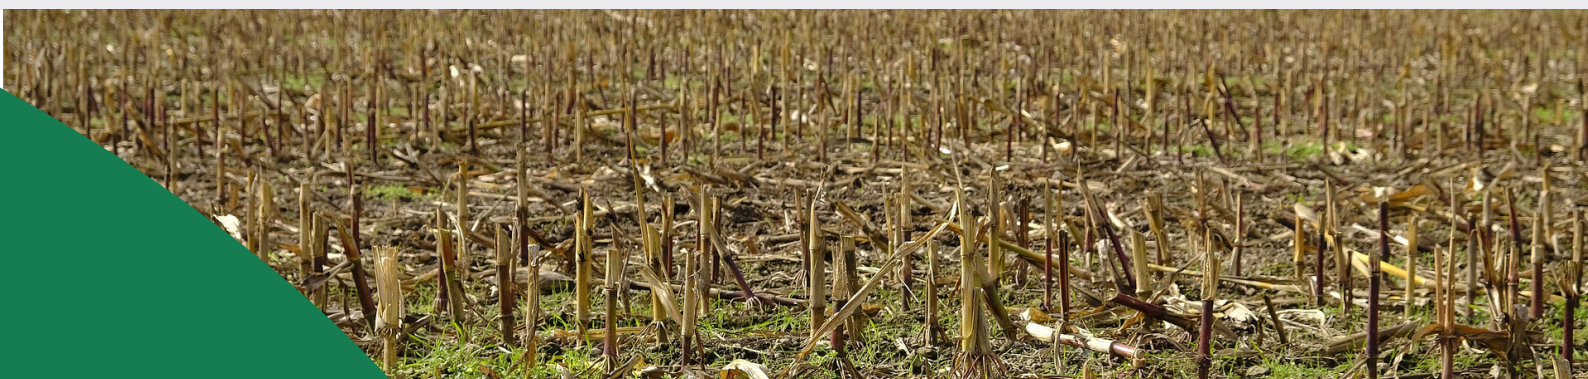

Together with European farmers, Lyckegård has developed the concept of CrimperRoller + KvikFinn

The concept involves processing of cover crops and mechanical weed control in one passage before sowing. We present two alternatives to add to your crop rotation. Timing and method depend on the presence of perennial weeds.

– *Alternative 1:*

Processing of a cover crop prior to sowing a spring or fall crop with a front mounted CrimperRoller and a rear mounted KvikFinn. The combination finishes the cover crop and plant residues are left on the surface. After that, sowing can be carried out with a disc seeder, with high pressure on the discs.

– *Alternative 2:*

Summer tread, green manure and fall crop sowing. An effective short summer tread can be managed with 3–4 crossings with KvikFinn with a 2–3 weeks interval to fight weeds. A fast growing green manure crop is sown and after 2–3 months a fall crop can be established with a CrimperRoller together with a direct drill. The green manure crop contributes with nutrition, retains soil moisture and protection against weeds.

Technical data

Working width:	3 m, or after you requirement
Diameter of drum:	400 mm
Outside diameter:	600 mm
Water filling:	300 liter
Delivered with:	Collision protection, lighting, width markers, retractable supports



Lyckegård Group AB

Lyckeåborgsvägen 65
371 92 Karlskrona, Sweden

+46 455 34 48 90
info@lyckegard.com

lyckegard.com

